


QuOmni 7V-2 Wi-Fi 6E

QuOmni 7V-2 Wi-Fi 6E offers a 360 degrees, 6dBi (2.4GHz) & 7.5dBi (5GHz and 7GHz) gain signal. It is a perfect indoor and outdoor device for industrial installations.

QuOmni 7V-2 is a concurrent dual band, Vertical polarity, MIMO 2x2 omni antenna. It simultaneously operates at **2.4GHz** with 6dBi gain and **5GHz+7GHz** with 7.5dBi gain. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. This antenna is predicted to be installed as the hotspot in parks, stadiums, warehouses, production halls, malls, lecture halls or another public places. Its aesthetic design is acceptable in most of the visible places. Wide frequency range (2.4-2.5GHz & 5.0-7.2GHz) helps to find suitable frequency for the most effective operation. The antenna comes in three versions: with 2*70cm (28inch) cables terminated with Nm, RPSMA, RPTNC connectors.

 **Wi-Fi 6E** **2x2 MIMO**
**2.4GHz + 5GHz
6GHz + 7GHz**
7 dBi
**OMNI
DIRECTIONAL**
IP 67
-40° TO +80°

TWO, 70CM CABLES



OUTDOOR ANTENNA WORKS IN **ANY
WEATHER CONDITIONS**, IP67



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



MADE IN **EUROPE**



WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	2xRPSMA/2xRPTNC/2xNm
OUTER DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg
OPERATING TEMPERATURE	-40°C to 80°C -40°F to 176°F

MOUNTING KIT

MATERIAL	Galvanized steel
WEIGHT	0.4kg
MOUNTING PLACE	Wall or ceiling or mast
MAST DIAMETER	40-60 mm 1.57-2.36 inch

COMPATIBLE ROUTERS

VARIANT: 07V.2RS

TELTONIKA	RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX10, RUTX11, RUTX12, RUTX50
DIGI	TX54 LTE-Advanced
ROBUSTEL	EG5100, EG5120, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite
ACKSYS	AirBox LTE, AirBox/10, AirLink, AirWan, AirXroad, AirXroad/4P
ADVANTECH	EKI-1361(-MB) EKI-1362, EKI-6233BN, EKI-6333AC-2GD
ANYBUS	Wireless Router WLAN
ARUBA	AP-204, AP-504, IAP-204, RAP-108
CAMBIUM NETWORKS	ePMP 4600L
CRADLEPOINT	IBR600C, IBR900, R1900, R920, S700
D-LINK	DAP-1665, DAP-2020, DAP-2310, DAP-2360, DIS-2650AP, DWL-8720AP, N300 4G

DIGI	TX54 LTE-Advanced
ENGENIUS	ENS500EXT
EXTREME NETWORKS	AP 7522, AP 7522E, AP122X, AP305CX
FORTINET	FAP-233G, FAP-U432F
HUAWEI	AP4051DN, AP4130DN, AP4151DN
MERU	AP1010E
MIKROTIK	L009UiGS-2HaxD-IN, RB922
MOXA	AWK-1131A Series, AWK-1137C Series, AWK-1151C Series, AWK-3131A Series, AWK-3252A Series
PEPLINK	AP One Rugged, B One, Balance 20X, BR1 Pro (CAT-20), BR1 Pro CAT-20, BR2 PRO, MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Pro 5G, MAX Transit, MAX Transit Duo Pro, UBR Plus
PERLE	IOLAN SCG W Secure Console Server, IOLAN SCG WM Secure Console Server, IOLAN SDG W Serial Device Servers
ROBUSTEL	EG5100, EG5120, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite
SIERRA WIRELESS	AirLink RV55, AirLink RX55
TELTONIKA	RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX10, RUTX11, RUTX12, RUTX50
WAVETEL	W240 4G/LTE, W2400 LTE , W3600 4G/LTE Dual WAN, WNR320 5G, WNR340 5G, WNR5501 5G
WLINK	ER120, G200, G230, G530, G530
ZYXEL	NWA55AXE
OTHER	2 * RPSMA

VARIANT: 07V.2RT


DIGI	WR44 RR
DIGI	WR44 RR
XIRRUS	XR-520H
OTHER	2 * RPTNC

VARIANT: 07V.2NM


ACKSYS	RuggedAir100
ANYBUS	WLAN Access Point IP67
CISCO	Catalyst IW9165D
D-LINK	DBA-3621P
EXTREME NETWORKS	AP 3917
MIKROTIK	L11UG-5HaxD
RUCKUS	T350SE
SIEMENS	6GK5766-1GE00-7DB0, 6GK5766-1GE00-3DA0, 6GK5766-1GE00-3DB0, 6GK5766-1GE00-7DA0, 6GK5766-1GE00-7TA0, 6GK5766-1GE00-7TB0, Scalance W738 M12, Scalance W778-1 M12, Scalance W778-1 M12 EEC
OTHER	2 * N-male

PLOTS



VSWR

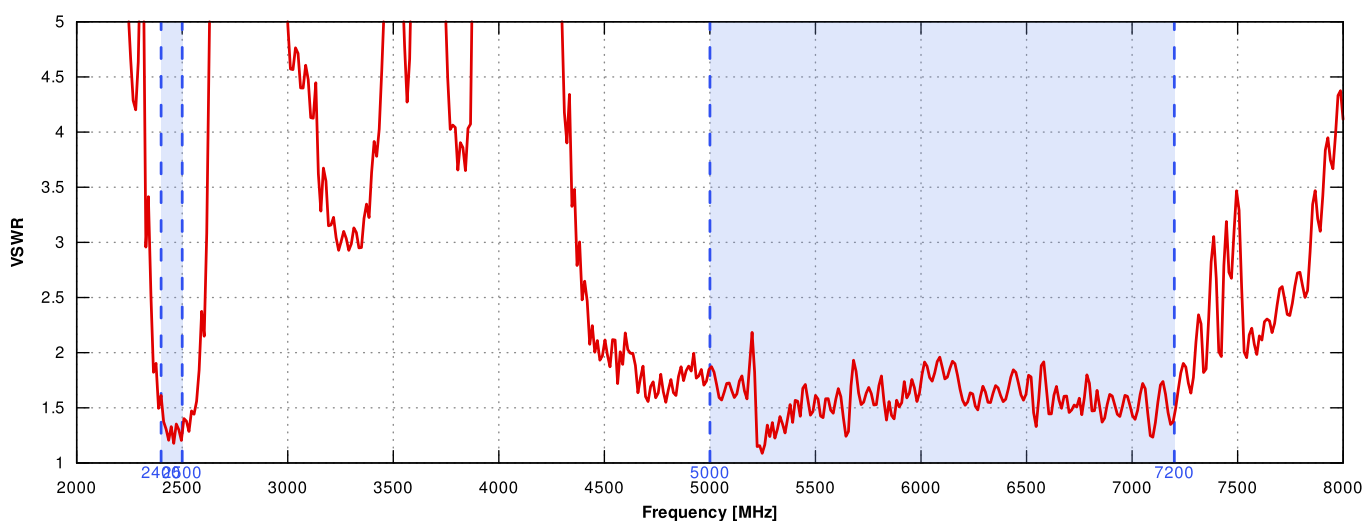

GAIN

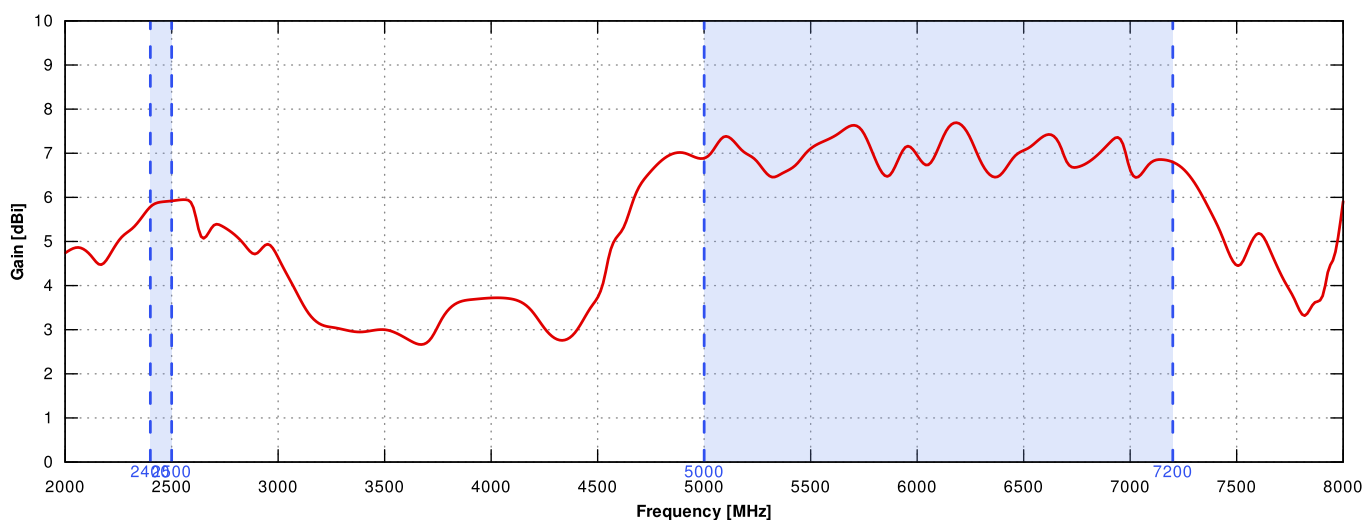

2.4GHz and 6.5GHz

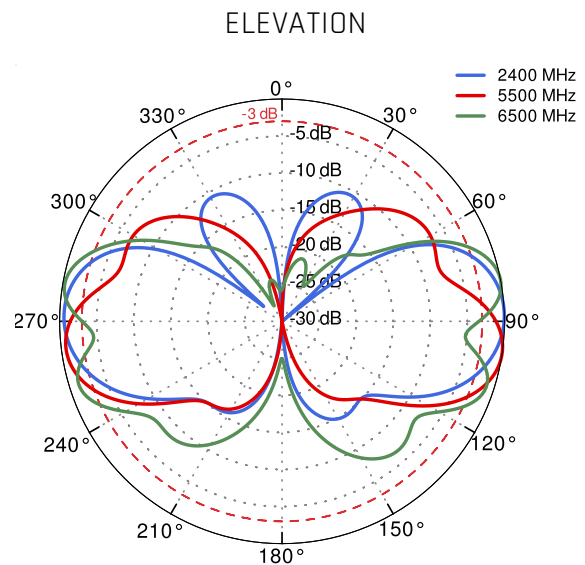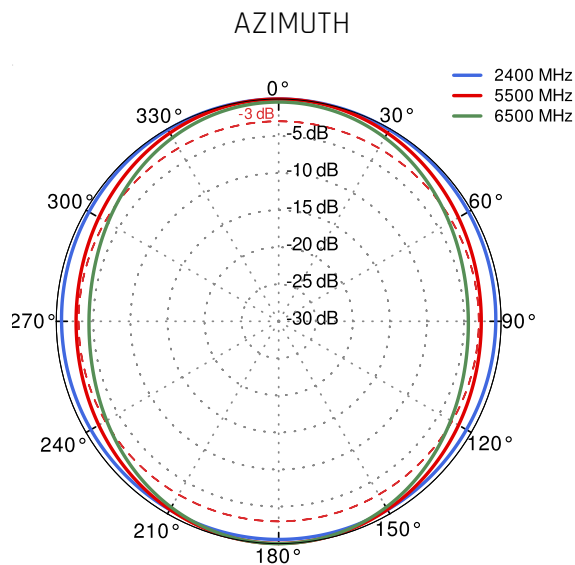

DIMENSIONS

