


QuSector 14HV-30-4 Wi-Fi 6e Nf

QuSector 14HV-30-4 Wi-Fi 6e Nf offers a 30 degrees, 14dBi gain signal with four 2.4GHz and 5GHz+7GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector 14HV-30-4 Wi-Fi 6e Nf is a concurrent dual band, H&V polarity, MIMO 4x4 panel antenna. It operates at 2.4GHz and 5-7.125GHz simultaneously with 14dBi gain. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. Wide frequency range (2.4-2.5GHz & 5.1-7.125GHz) helps to find suitable frequency for the most effective operation. The antenna comes with four Nf connectors.

Wi Fi 6E
2.4GHz + 5GHz
6GHz + 7GHz
14 dBi
DIRECTIONAL
IP 67
-40° TO +80°
4x4 MIMO

OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



WALL OR MAST MOUNTING SYSTEM
WITH **TWO PLANES, 60 DEGREES**
REGULATION



MADE IN **EUROPE**



WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5GHz 5.1 - 7.125GHz
GAIN	14 dBi
VSWR	< 2.00
BEAMWIDTH	30°/30°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 Ω
SEPARATION BETWEEN CONNECTORS	>25dB
FRONT-TO-BACK	> 20dB >25dB
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xNf
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 60mm 0.98-2.36 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast

COMPATIBLE ROUTERS

VARIANT: S14HV.30.4NF

DIGI	TX64
ADTRAN	Bluesocket 1925, Bluesocket 6120
ADVANTECH	EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12
AEROHIVE NETWORKS	AP1130
ALCATEL-LUCENT	Stellar AP1222, Stellar AP1322
ARISTA	O-105E
ARUBA	AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-584, AP-634, IAP-314, IAP-324, IAP-334
CAMBIUM NETWORKS	ePMP 4600

CISCO	AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-AP1852E, AIR-AP2602E, AIR-AP2702E, AIR-AP2802E, AIR-AP3602E, AIR-AP3702E, AIR-AP3802E, AIR-AP3802P, AIR-CAP1532E, AIR-CAP2702E, AIR-CAP3702E, AIR-CAP3702P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, Catalyst 9130AXE, Catalyst 9163E, Catalyst IW9165E, IW3702-2E, IW3702-4E, IW6300, MR42E, MR46E, MR53E, MR74, MR76, MR84, MR86
COMSET	CM770W-6
CRADLEPOINT	E3000
D-LINK	DWL-6600AP, DWL-6610APE, DWL-8600AP, DWL-8710AP
DIGI	TX64
ENGENIUS	EAP1300EXT, ECW160, ECW260, ENH1350EXT, ENS620EXT, ESW850, EWS850-FIT
EXTREME NETWORKS	AP 305Cx, AP 360E, AP 3965E, AP 8533, AP3000X, AP310e
FORTINET	AP1020E, AP822E, FAP-222C, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F
FOUR-FAITH	5G Industrial CPE F-NR200
HUAWEI	AirEngine 9700D-S, AP6150DN, AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN
JUNIPER NETWORKS	AP41E
MIKROTIK	RB912
MILESIGHT	UR75
MIST	AP32E, AP41E, AP43E, AP61E
PEPLINK	AP Pro AX, Balance 310 fiber 5G, MAX HD2, MAX HD4
RUCKUS	T750SE

SIEMENS

6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0, SCALANCE W1788

WAVETEL

W3604 Multi-WAN, W3608 Multi-WAN

WLINK

G930

XIRRUS


XH2-120

OTHER


4 * N-male, 4 * RPSMA, 4 * RPTNC

PLOTS



VSWR

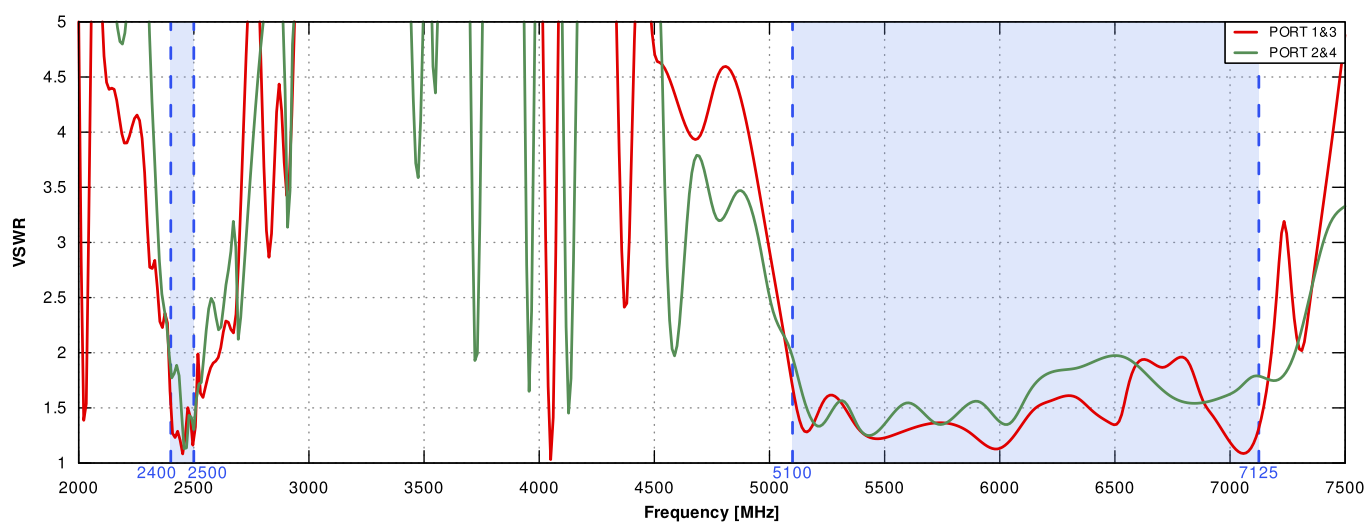


Gain

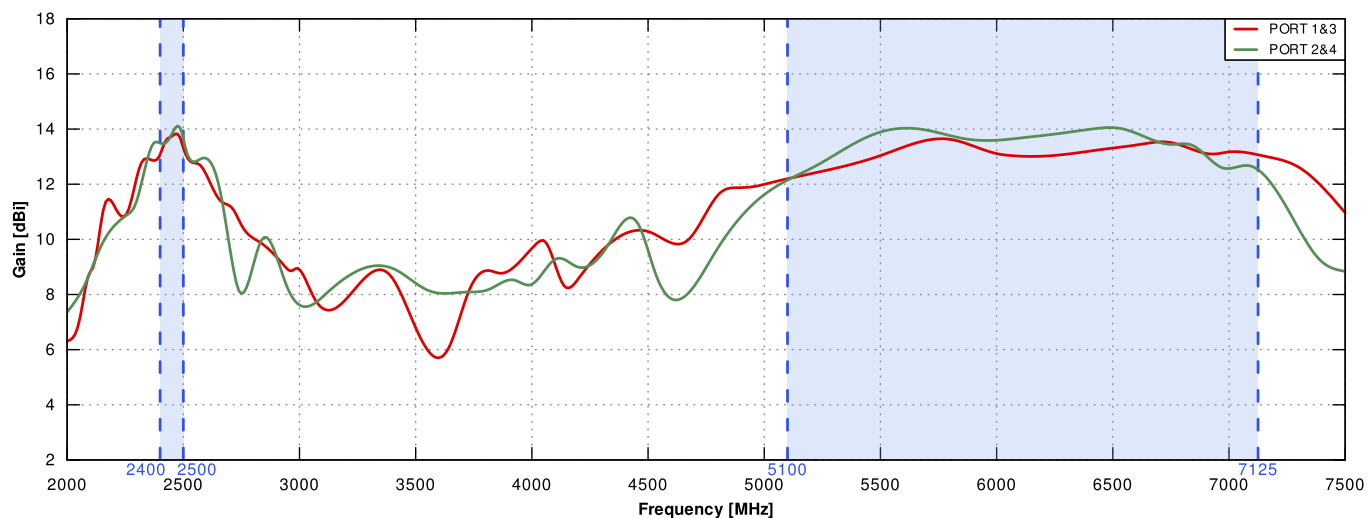


PORT 1, 3 from 2.4GHz to 2.5GHz

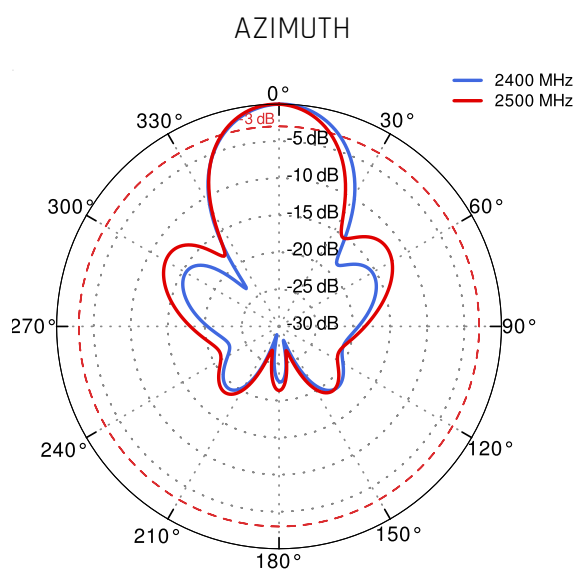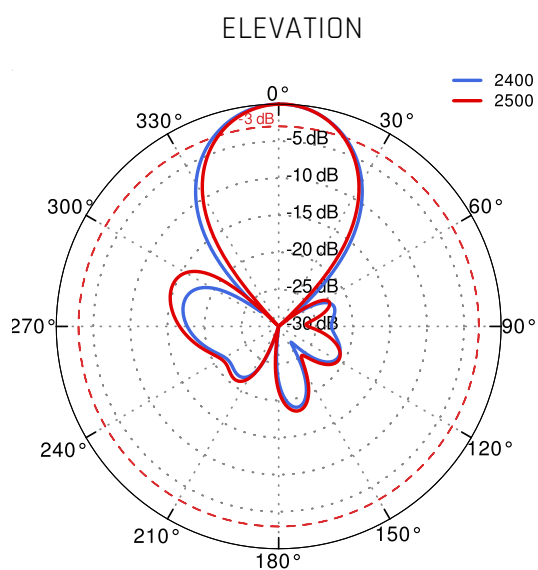



PORT 1, 3 from 5.1GHz to 6.9GHz

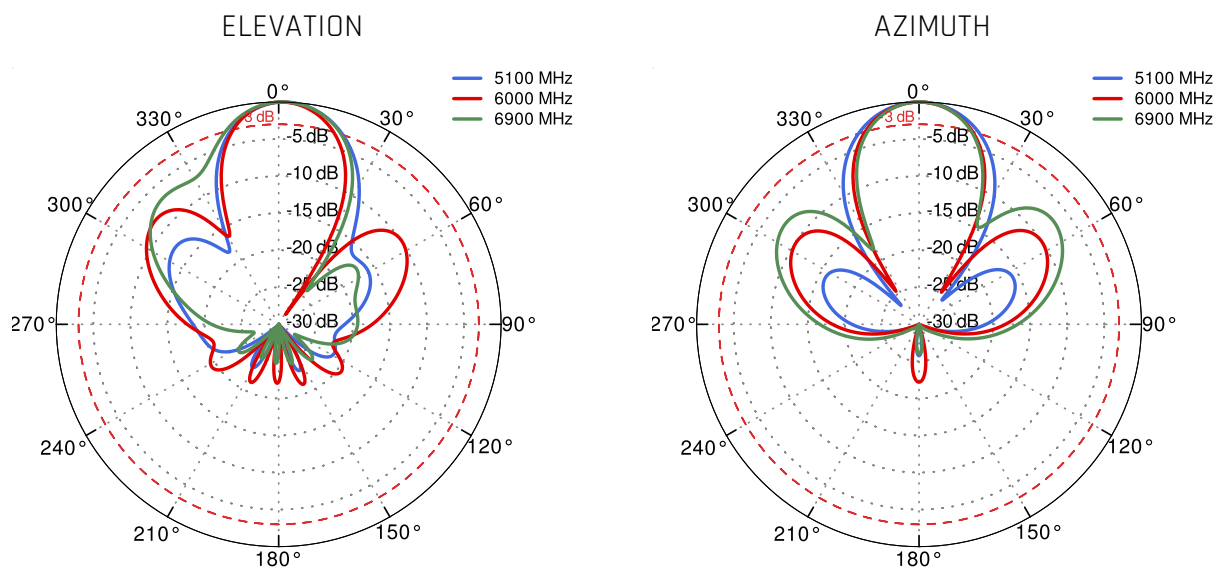

PORT 2, 4 from 2.4GHz to 2.5GHz

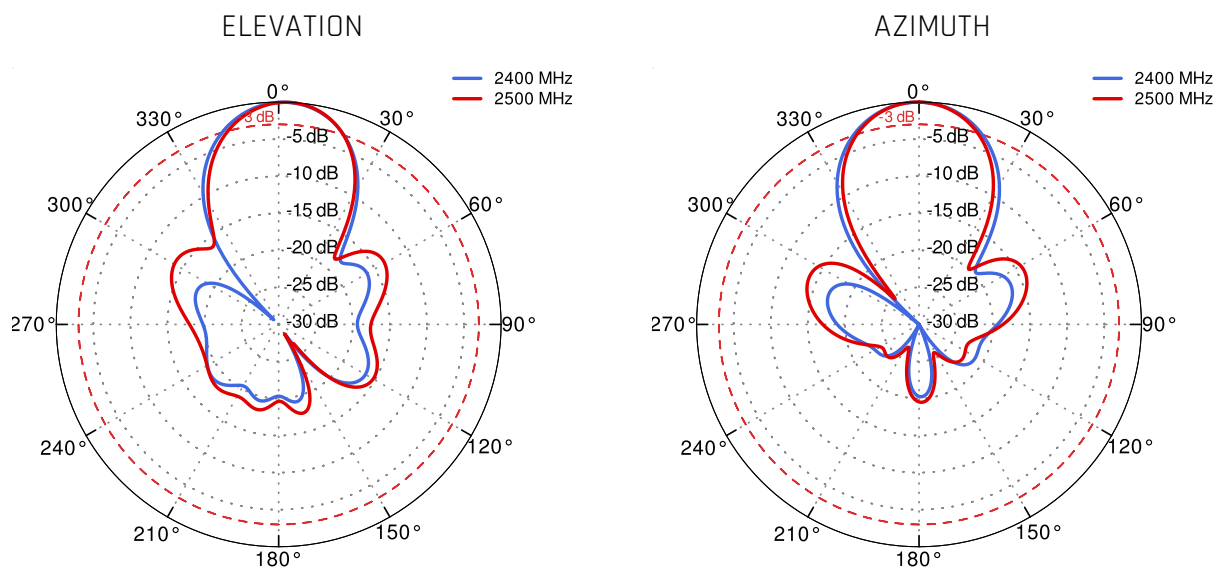

PORT 2, 4 from 5.1GHz to 6.9GHz

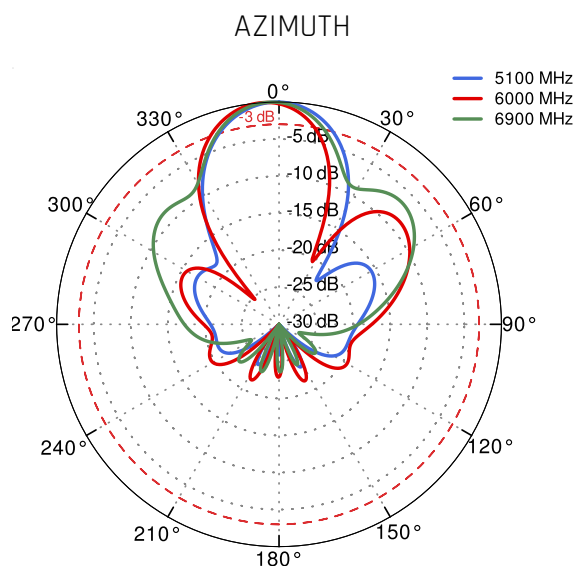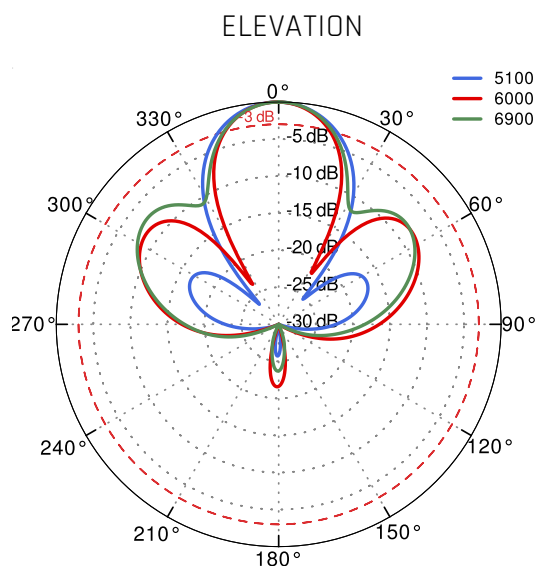

DIMENSIONS

