

QuSector 9HV-65-4 Wi-Fi 6E

QuSector 9HV-65-4 Wi-Fi 6E offers a 65 degrees, 8dBi (2.4GHz) & 9dBi (5GHz-7GHz) gain signal. It is a perfect indoor and outdoor device for industrial installations.

QuSector 9HV-65-4 is a concurrent dual band, H&V polarity, MIMO 4x4 panel antenna. It simultaneously operates at **2.4GHz** with 8dBi gain and at **5GHz-7GHz** with 9dBi gain. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. Wide frequency range (2.4-2.5GHz & 5-7.125GHz) helps to find suitable frequency for the most effective operation. It is designed to be applied mainly to special access points working in the systems where two bands (frequencies) are diplexed for one antenna connector. The antenna comes in three configurations: with 4*70cm (28inch) cables terminated with Nm, RPSMA, RPTNC.

Part Number: RPTNC - S9HV.65.4RT; RPSMA - S9HV.65.4RS; Nm - S9HV.65.4NM;

Wi Fi 6E**4x4 MIMO****2.4GHz + 5GHz
6GHz + 7GHz****9 dBi****DIRECTIONAL****IP 67****-40° TO +80°**

OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH
THE ACCESS POINT



ADJUSTABLE, POLE MOUNTING
SYSTEM



MADE IN **EUROPE**



WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5 - 7.125 GHz
GAIN	2.4 - 2.5 GHz: 8 dBi 5 - 7.125 GHz: 9 dBi
VSWR	< 1.80
BEAMWIDTH	2.4 - 2.5 GHz - 65°/65° 5 - 7.125 GHz - 60°/60°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 Ω
SEPARATION BETWEEN CONNECTORS	2.4 - 2.5 GHz: > 33dB
FRONT-TO-BACK	2.4 - 2.5 GHz: 20dB 4.9 - 6 GHz: 25dB
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xRPSMA/4xNM/4xRPTNC
OUTER DIMENSIONS	16.5 x 16.5 x 4.5 cm 6.5 x 6.5 x 1.77 inch
WEIGHT	0.9 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

MOUNTING KIT

MATERIAL	Galvanized steel
WEIGHT	0.3 kg
MOUNTING PLACE	Mast
MAST DIAMETER	40-60 mm 1.57-2.36 inch

PART NUMBER

RPTNC	S9HV.65.4RT
RPSMA	S9HV.65.4RS
NM	S9HV.65.4NM

COMPATIBLE ROUTERS

VARIANT: S9HV.65.4RT

CISCO

AIR-AP1852E, AIR-AP2602E, AIR-AP2702E, AIR-AP2802E, AIR-AP3602E, AIR-AP3702E, AIR-AP3802E, AIR-AP3802P, AIR-CAP2702E, AIR-CAP3702E, AIR-CAP3702P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, MR42E, MR46E, MR53E

OTHER

4 * RPTNC

VARIANT: S9HV.65.4RS

ADTRAN

Bluesocket 1925

ADVANTECH

EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12

ALCATEL-LUCENT

Stellar AP1222, Stellar AP1322

ARUBA

AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-634, IAP-314, IAP-324, IAP-334

CAMBIUM NETWORKS

ePMP 4600

CISCO

Catalyst IW9165E

COMSET

CM770W-6

D-LINK

DWL-6600AP, DWL-6610APE, DWL-8600AP

ENGENIUS

EAP1300EXT, ECW160, ECW260, ENS620EXT, ESW850

EXTREME NETWORKS

AP 305Cx, AP 8533, AP3000X, AP310e

FORTINET

AP1020E, AP822E, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F

HUAWEI

AP6150DN

JUNIPER NETWORKS	AP41E
MIKROTIK	RB912
MIST	AP32E, AP41E, AP43E, AP61E
PEPLINK	Balance 310 fiber 5G, MAX HD2, MAX HD4
WAVETEL	W3604 Multi-WAN, W3608 Multi-WAN
WLINK	G930
OTHER	4 * RPSMA

VARIANT: S9HV.65.4NM

AEROHIVE NETWORKS	AP1130
ARISTA	O-105E
CISCO	AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-CAP1532E, Catalyst 9163E, IW3702-2E, IW3702-4E, IW6300, MR74, MR76, MR84, MR86
D-LINK	DWL-8710AP
EXTREME NETWORKS	AP 360E, AP 3965E
FORTINET	FAP-222C
HUAWEI	AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN
PEPLINK	AP Pro AX
RUCKUS	T750SE
SIEMENS	6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0

XIRRUS


XH2-120

OTHER


4 * N-male

PLOTS

VSWR

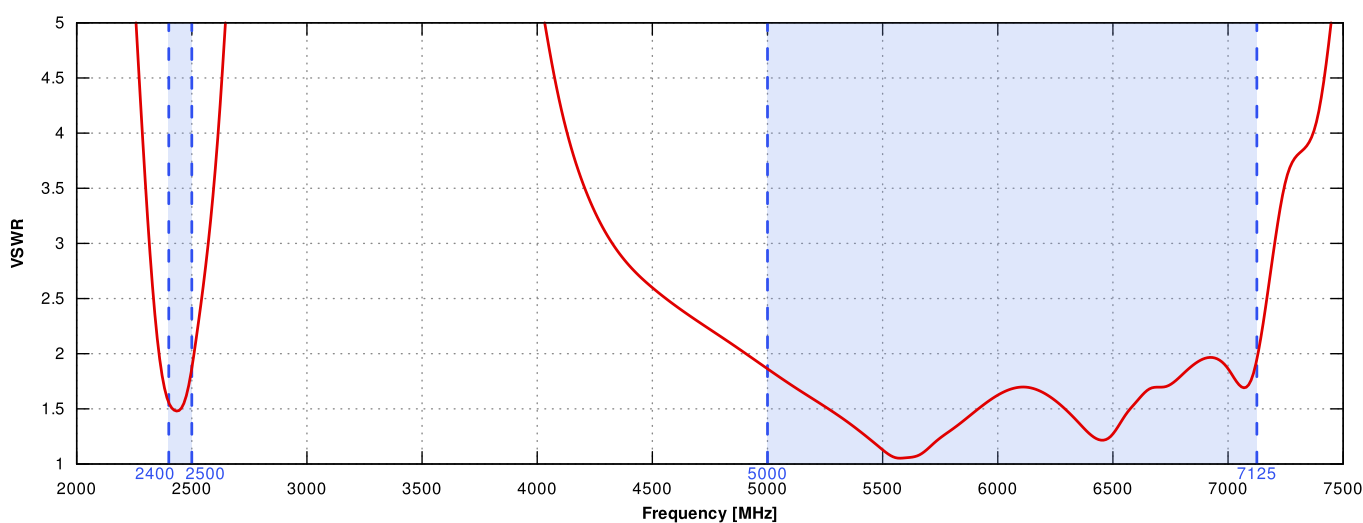


Gain

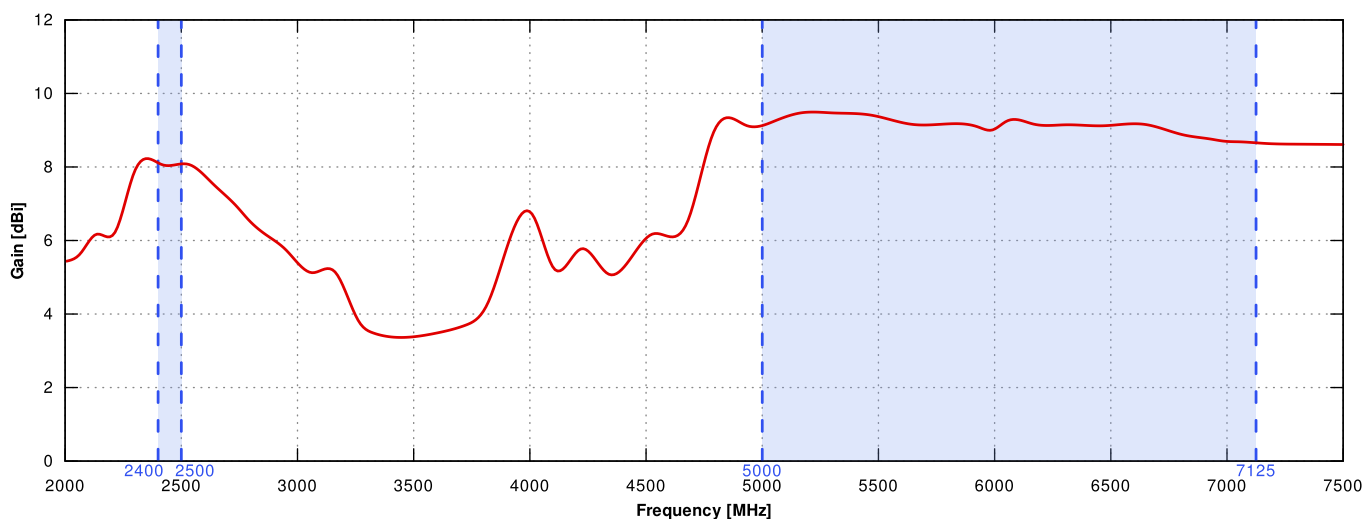


2.4GHz to 2.5GHz

PORT 1&3 ELEVATION

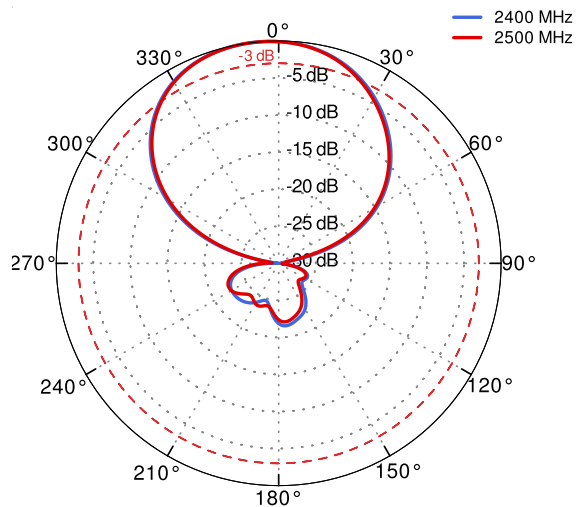


PORT 1&3 AZIMUTH

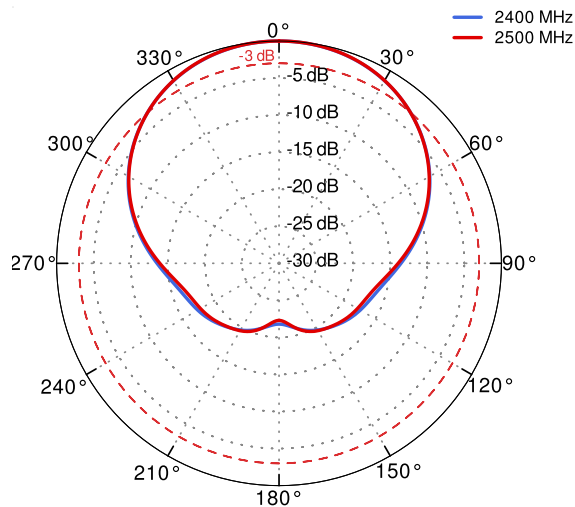


5GHz to 6GHz



PORT 1&3 ELEVATION

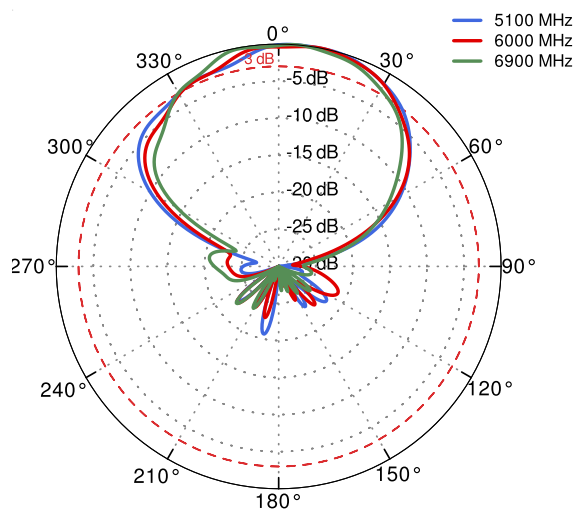



PORT 1&3 AZIMUTH

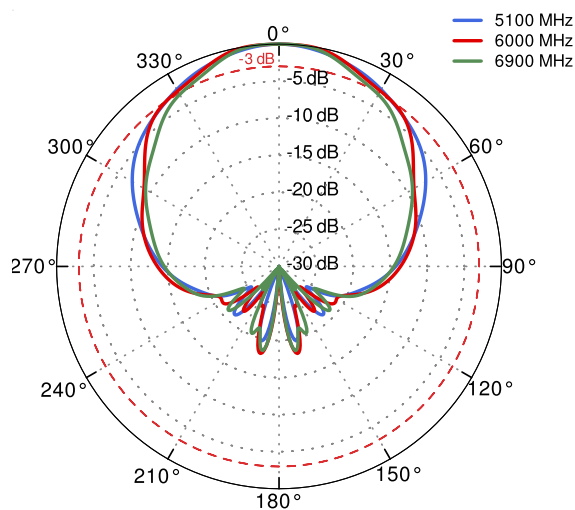

2.4GHz to 2.5GHz

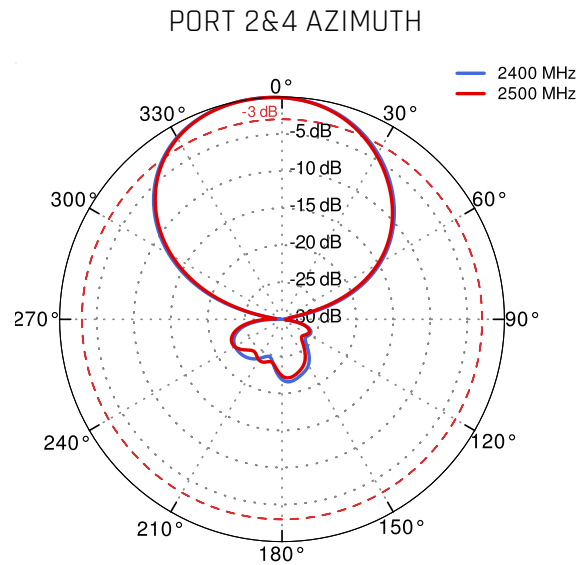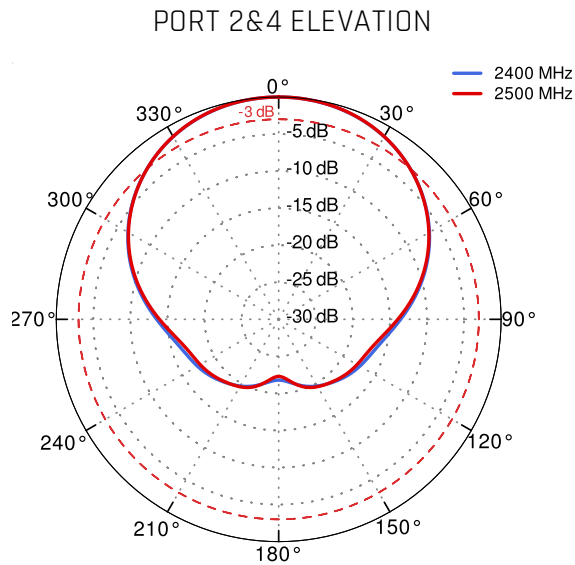

5GHz to 6GHz

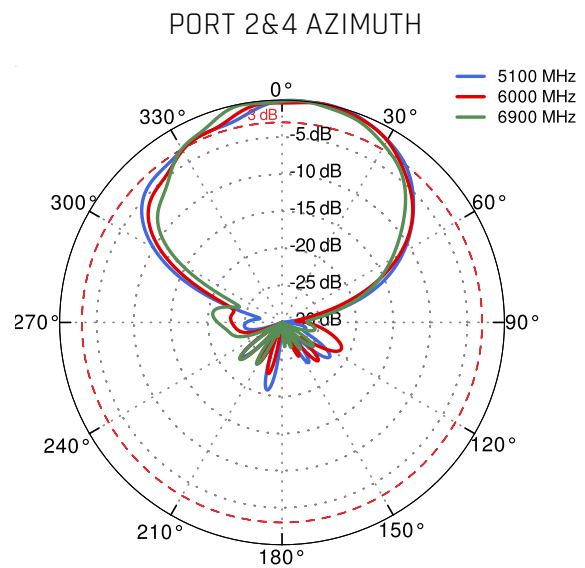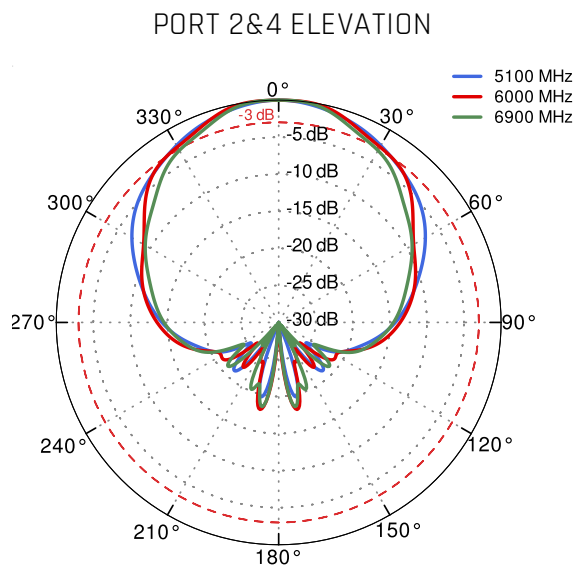

DIMENSIONS

